

## Sample Gas Coalescing Filter K-AGF-VA-350

In specific gas technology applications, high pressure keeps the gas inside the systems. The undesirable disturbance variables also include aerosols in the gas in these types of systems. The aqueous suspended particles can easily be removed from the gas by coagulation using special filter matrices. During this process, the tiny aerosols accumulate on the fibres of the filter matrix through collision, forming drops increasing in size. Once large enough, the condensate which forms drains into the filter bowl and is then removed.

Model K-AGF-VA-350 has a stainless steel housing for operating pressures up to 350 bar.

Very quick and easy filter changes without tools


Low dead volume

Variable wall mounting via mounting bracket

(Auto-) condensate drain option through connection thread (NPT 1/4") inside the filter cover



Dimensions

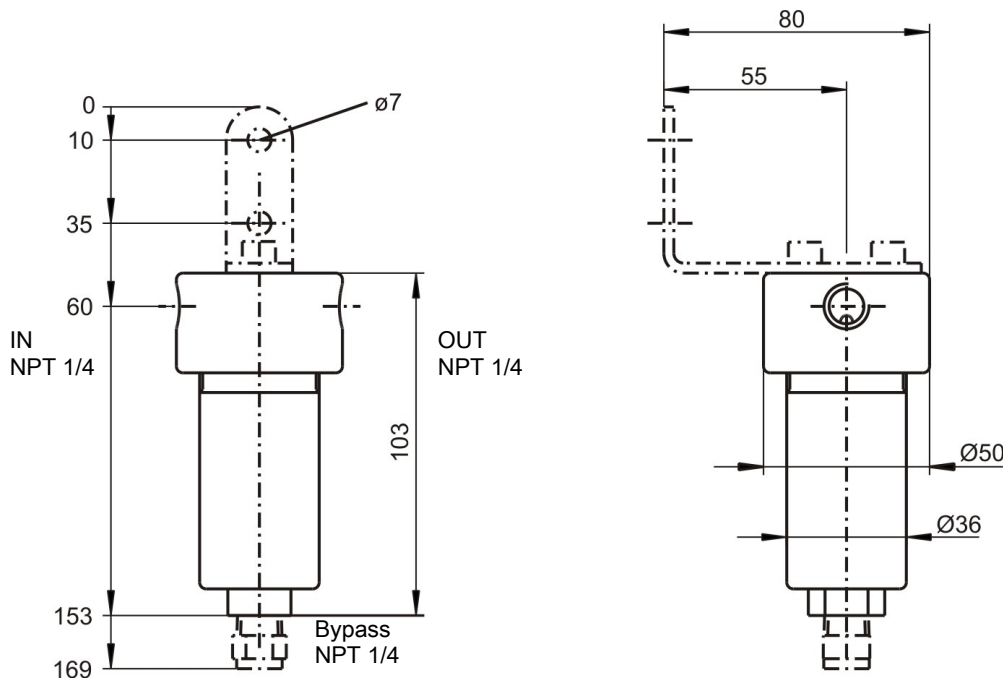

**Use in explosive areas (additional notices):**

The filter meets the fundamental safety requirements of Directive 2014/34/EU and is suitable for use in Category 2G, Explosion class IIC areas. The filter is not marked, as it does not have an innate ignition source and Directive 2014/34/EU therefore does not apply.

Flammable gases, explosion class IIC, which could occasionally be explosive during normal operation may be conveyed through the filter.

**Be sure to observe the instructions in the respective operating instructions!**

**Ambient temperature range when used in Ex areas:**  $-5\text{ °C} \leq T_{\text{amb}} \leq 60\text{ °C}$ .

Technical Data

Filter

Dead volume with filter element	18 ml
Material - filter housing	1.4404 (SS 316L)
Material - gasket	Viton FEP shrouded
Material - filter element	see table
Weight	approx. 0.8 kg
Operating pressure max.	350 bar
Medium temperature max.	150 °C

Ordering instructions

Filter

Item No.	Model	Material
41 35 099	K-AGF-VA-350-T, empty housing	1.4404 (SS 316L), Viton gasket, FEP shrouded
41 35 9993	Mounting bracket	1.4301 (SS 304)
90 08 802	Plug NPT 1/4	1.4401 (SS 316)
90 09 297	O-ring	Viton / FEP shrouded

Filter element

Item no.	Model	Filter element	Material	Filter surface	Packing unit	Ex application
49 32 002	12-57-C	Sleeve	Borosilicate fibre	28 cm <sup>2</sup>	1 pieces	IIC

Axis Solutions Pvt Ltd is the Authorized Distributor of Bühler Technologies GmbH in India  
[www.axisindia.in](http://www.axisindia.in) | [info@axisindia.in](mailto:info@axisindia.in)