

EB-2141 / EB-2241

2 Port Serial to Ethernet Convert




Feature

- Multi Serial interfaces
- Operation Modes : TCP server; TCP client; UDP; Virtual COM; Paring
- Built in 15KV ESD protection for all signals
- Web Browser configuration
- Easy installation Windows utility
- Watchdog function
- Support 1x Master or 1x Slave only.



Application Example

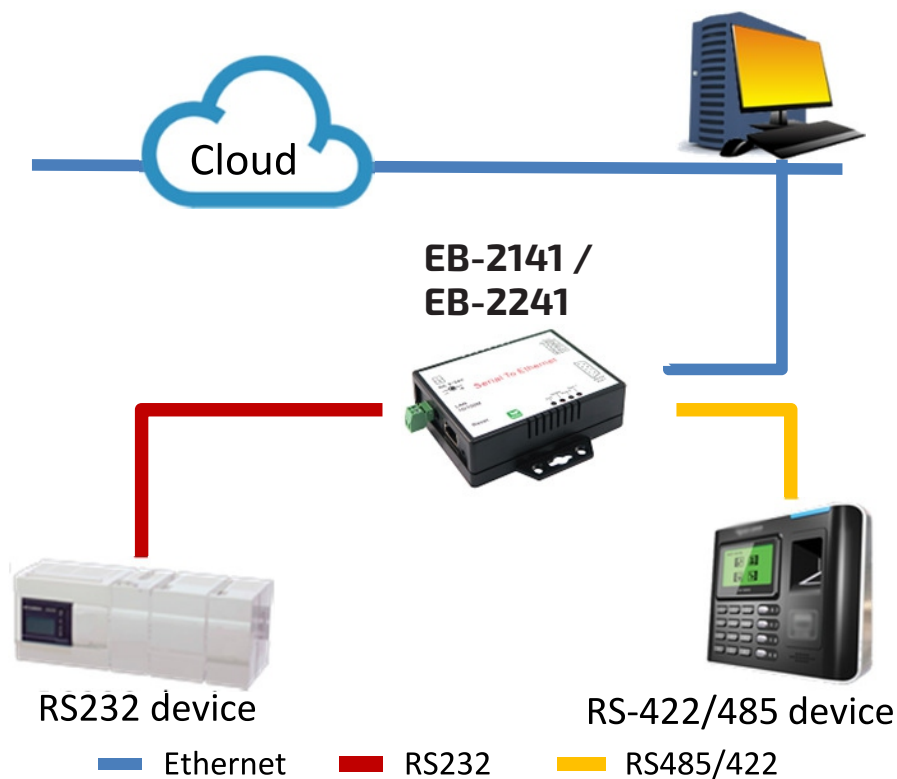

Specifications

Hardware

CPU	32-bit ARM-Cortex-M4 CPU , 120 MHz
RAM	256K bytes SDRAM
ROM	1M bytes Flash ROM
Watchdog	Built in H/W Watchdog timer

Ethernet

Port number	1
MDI / MDI-X	RJ-45 Connector
Speed	10 / 100 Mbps (Auto Detect)
Protocol	ARP, IP, ICMP, UDP, TCP, HTTP, DHCP
Mode	TCP Server / TCP Client / UDP / Virtual Com / Pairing
Setup	HTTP Browser Setup (IE, Chrome, Firefox)
Security	Login Password
Protection	Built-in 1.5KV Magnetic Isolation

Serial Interface

Port number	2
Connector	EB-2141 : RS-232/422/485 x 1 Port , RS- 422/485 x 1 Port (Auto Detect)
Connector	EB-2241 : RS-232 x 1 Port (DB9) , RS-422/485 x 1 Port (Auto Detect)
Speed	9/125µm ; 1310nm or 1550nm
Parity	50/125, 62.6/125 µm ; 850nm or 1310nm
Data Bit	RS-232 x 1 Port (DB9) , RS-422/485 x 1 Port (Auto Detect)
Stop Bit	9/125µm ; 1310nm or 1550nm
Port 1 RS-232	Rx , Tx , GND
Port 2 RS-422	Rx+ , Rx- , Tx+ , Tx-
RS-485	Data+ , Data-
Built-in	RS-422/485 pull high / low Resistor
Protection	422/485 Surge & Over Current Protection Built in 15KV ESD protection for all signals

LED

LED	SYS (PWR), LAN, PORT 1, PORT 2
------------	--------------------------------

Software Features

OS Supported	Support Win-8, Win-7 , Vista , Win-XP , Win- 2003 server , Win-10
Configuration	Window Utility, Web Browser

Power

Input	DC 9 ~30V, 300mA@ 12VDC
Consumption	< 4W

Environment

Temperature Operating: -10°C ~ 70°C (14°F ~ 158°F)
Storage: -20°C ~ 80°C (-4°F ~ 176°F)

Humidity Operating: 10% ~ 95% non-condensing
Storage: 5% ~ 95% non-condensing

Regulatory Approvals

RoHS Compliance

Warranty

Warranty period 1 year

Ordering Information

EB-2141 2 Port Serial to Ethernet Convert-485

EB-2241 2 Port Serial to Ethernet Convert

Due to continuous improvement, all product specifications are subject to change without further notice.



Axis Solutions Pvt. Ltd.

Plot No. 324, Road No.5, G.I.D.C., Kathwada,
Ahmedabad-382 430, Gujarat, India.
info@axisindia.in | www.axisindia.in
Tel. : +91792290 0860/61